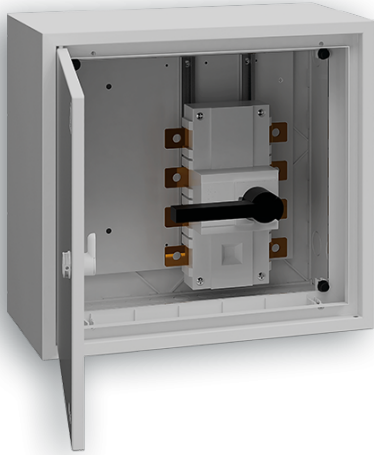


DATASHEET
0014500319
CCT SWITCH DISCONNEX SMX BOX 630A W550 W/MX


Dimensions	550x375x200
WxHxD (mm)	
Locking System	Triangular plastic cam lock + key
Color	Grey - RAL 7035

Observations	This product is supplied exclusively as an integral part of an equipped and tested set, ensuring compliance with applicable standards.
---------------------	--

Materials

Enclosure	Plastic - PSHI
Frame and door	Grey lacquered aluminium

Protection and Security

Insulation Class	Class II Insulation
IP Protection Degree	43
IK Protection Degree	09
GWT	850°C
Static Load	200kg/m3
Mechanical Reinforcement	Sim
Installation Temperature	Mín: -5°C Máx: 40°C

Electrical Features

In	630A
Ue	230V/400V~
Ui	500V
degree of pollution	3
Frequency	50Hz
Icc (kA)	10kA

Included Accessories

Kit Document Holder	Sim
----------------------------	-----

Standardizing Documentation

Standards	EN IEC 61439-2
Directive	2014/35/EU
	DIT-C14-140/N
Regulations	RTIEBT

Nota: The image may not correspond to the product code shown. Please refer to the technical specifications.